


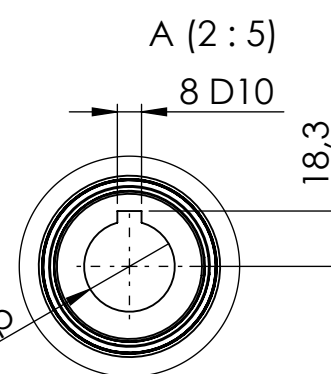


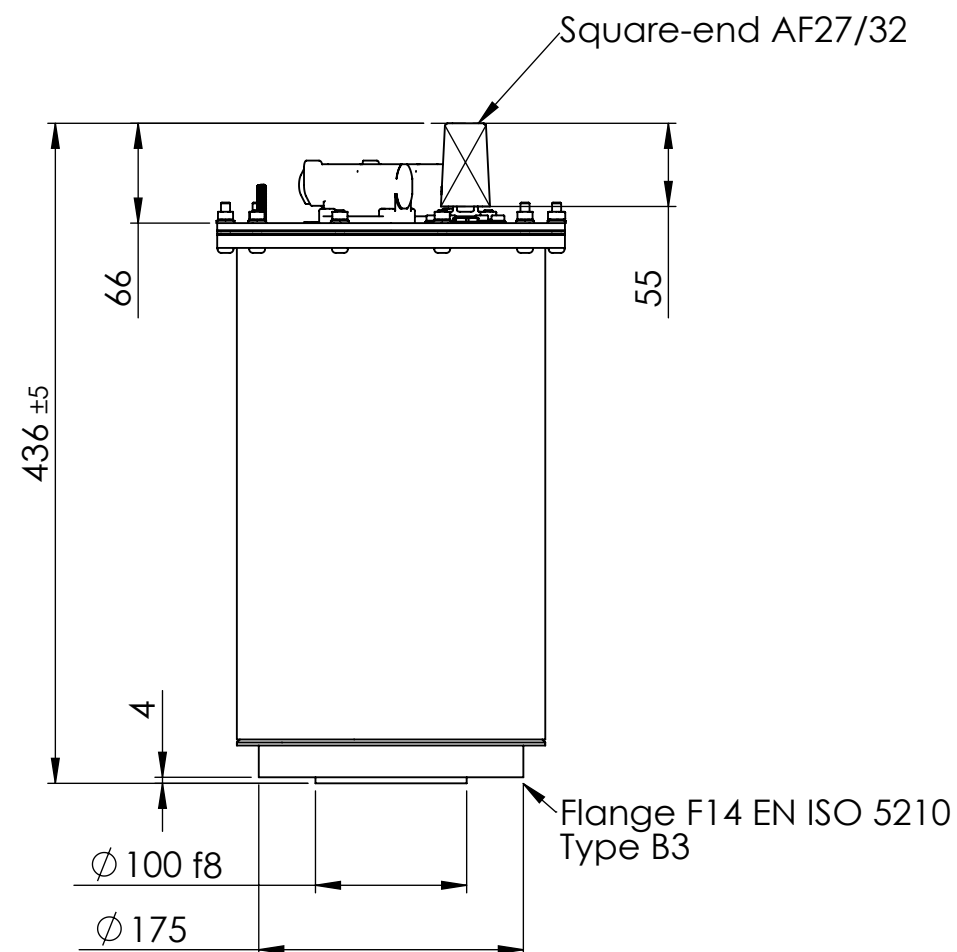

Bottom view

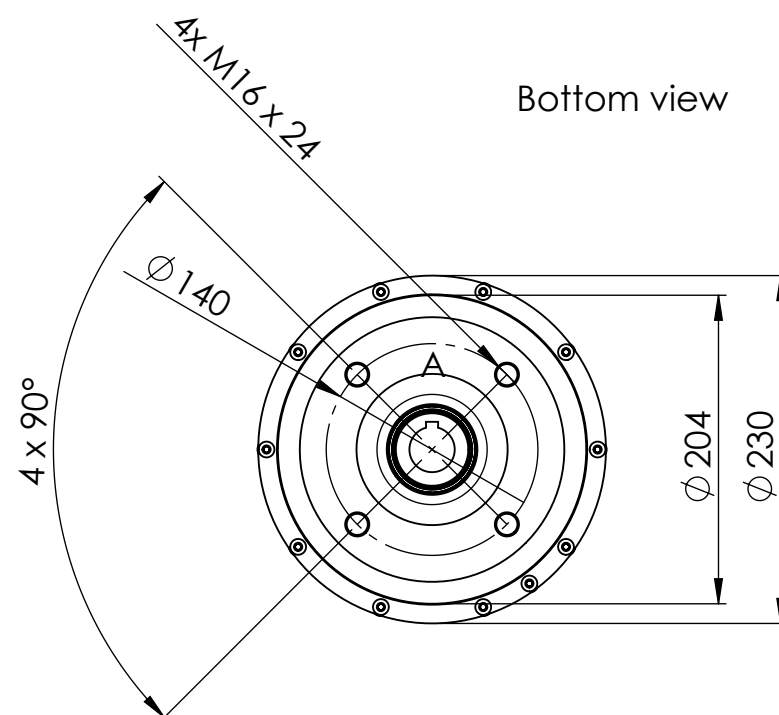

Top view
1:2

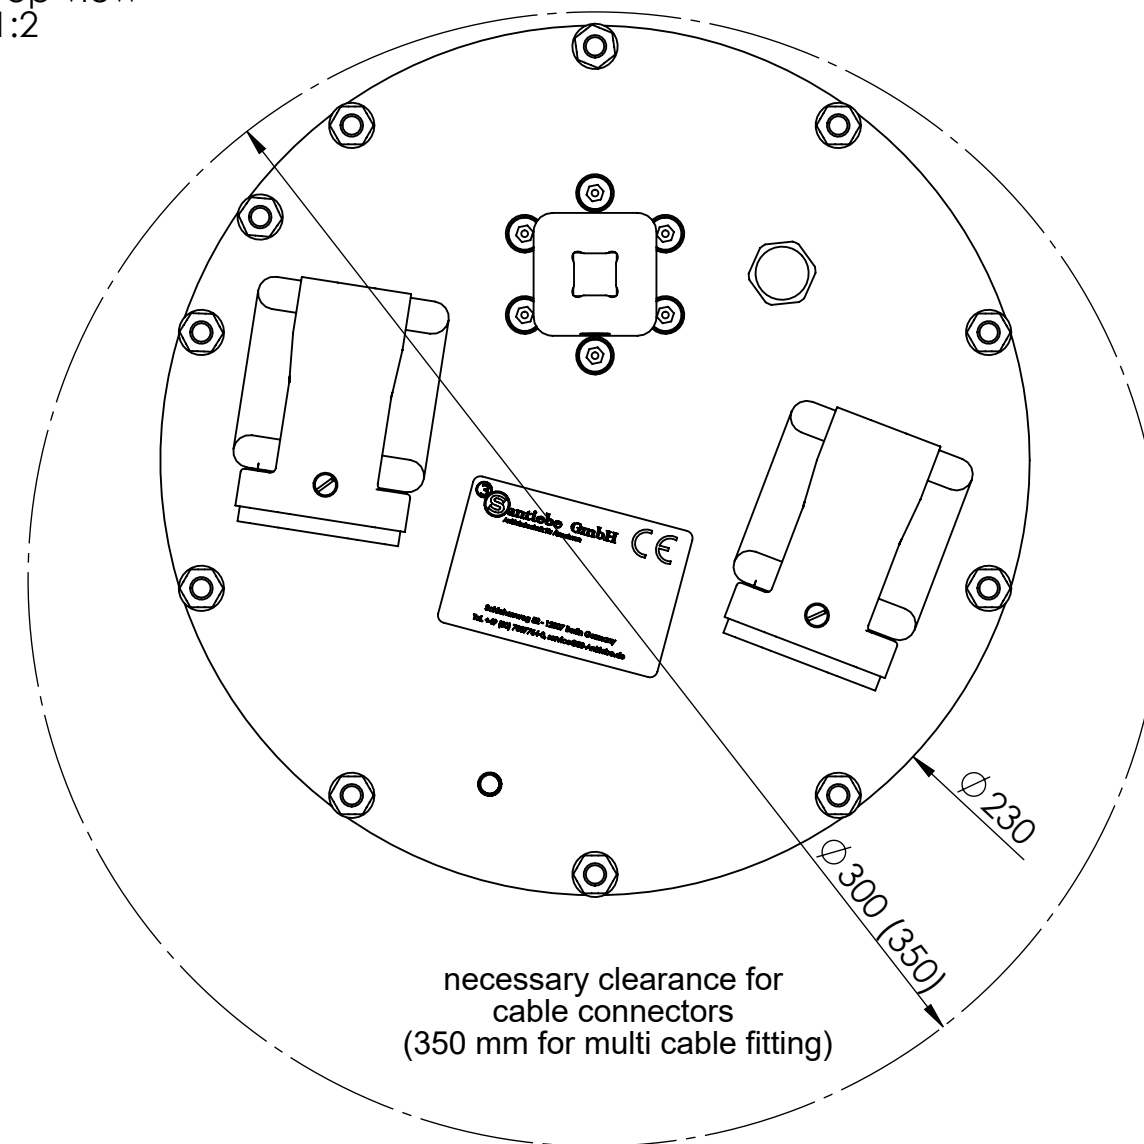

Protection class according to DIN EN 60529: IP 68 2m

Mounting position: upright

Manhole installation:

- max. 300 mm distance from square-end to surface level
- 300/350 mm eccentric clearance for cable connectors as shown
- 250 mm centric clearance in manhole cover with respect actuator



Title Customer Drawing 3S 500 D						 Antriebstechnik für Armaturen	
Material -			Drawing type Customer drawing		Sheet No 1 / 1	Tolerances	
Weight (g) 31000	Scale 1:5	Date 07.01.2026	Drawn by D. Bohle	Checked by S. Sacharowitz	Format A3	Index 4	DWG No 02.0202