
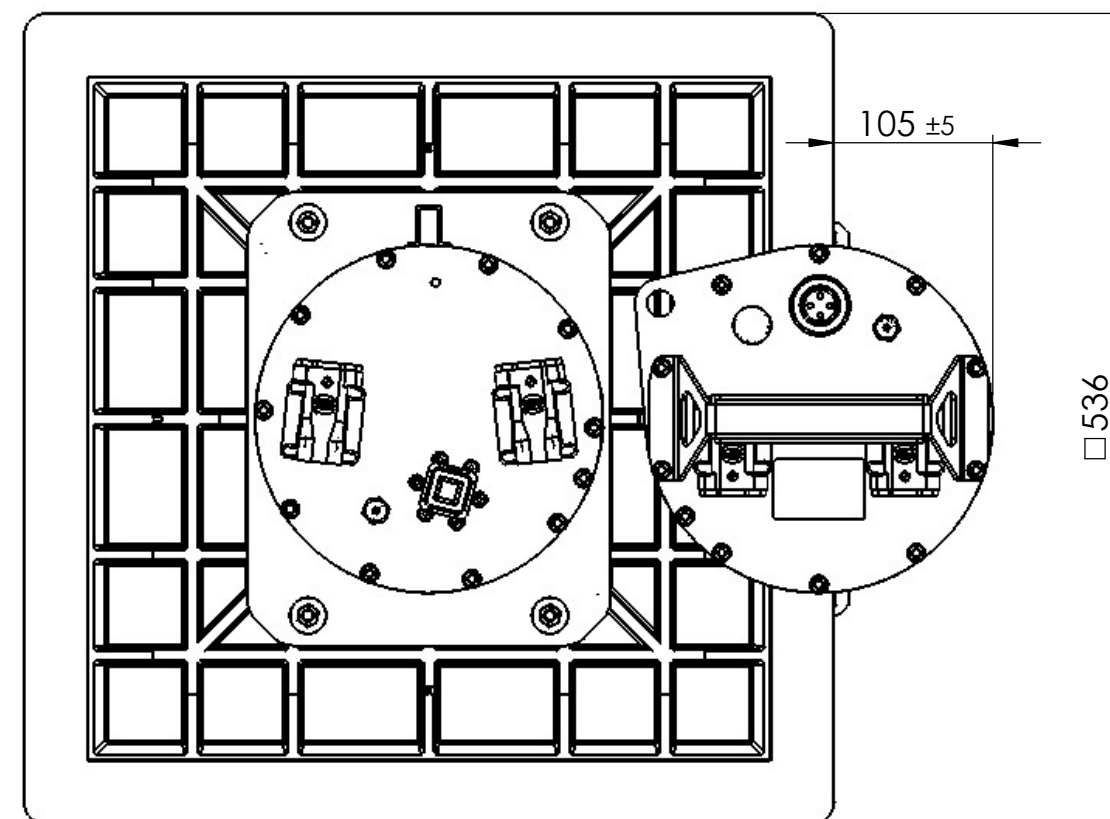
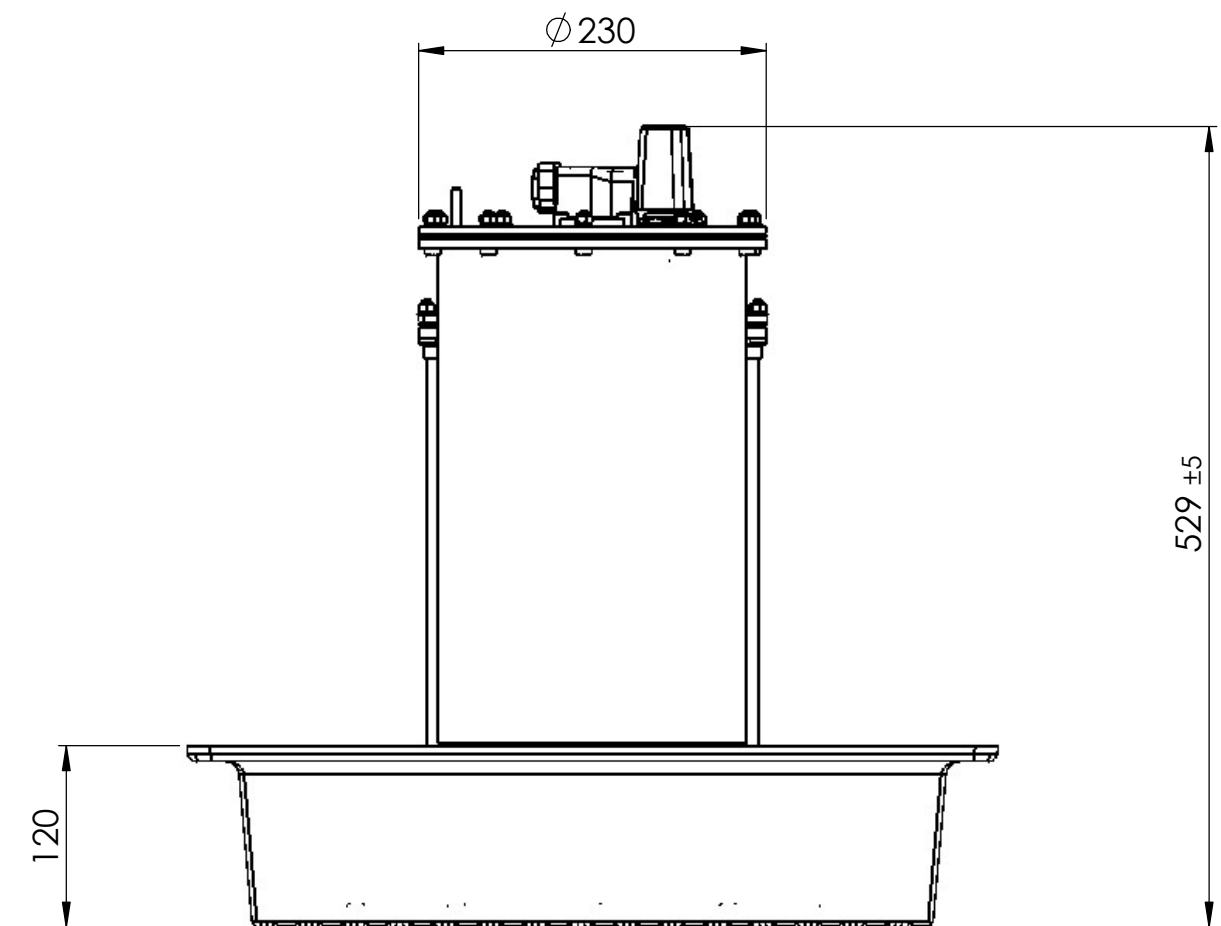


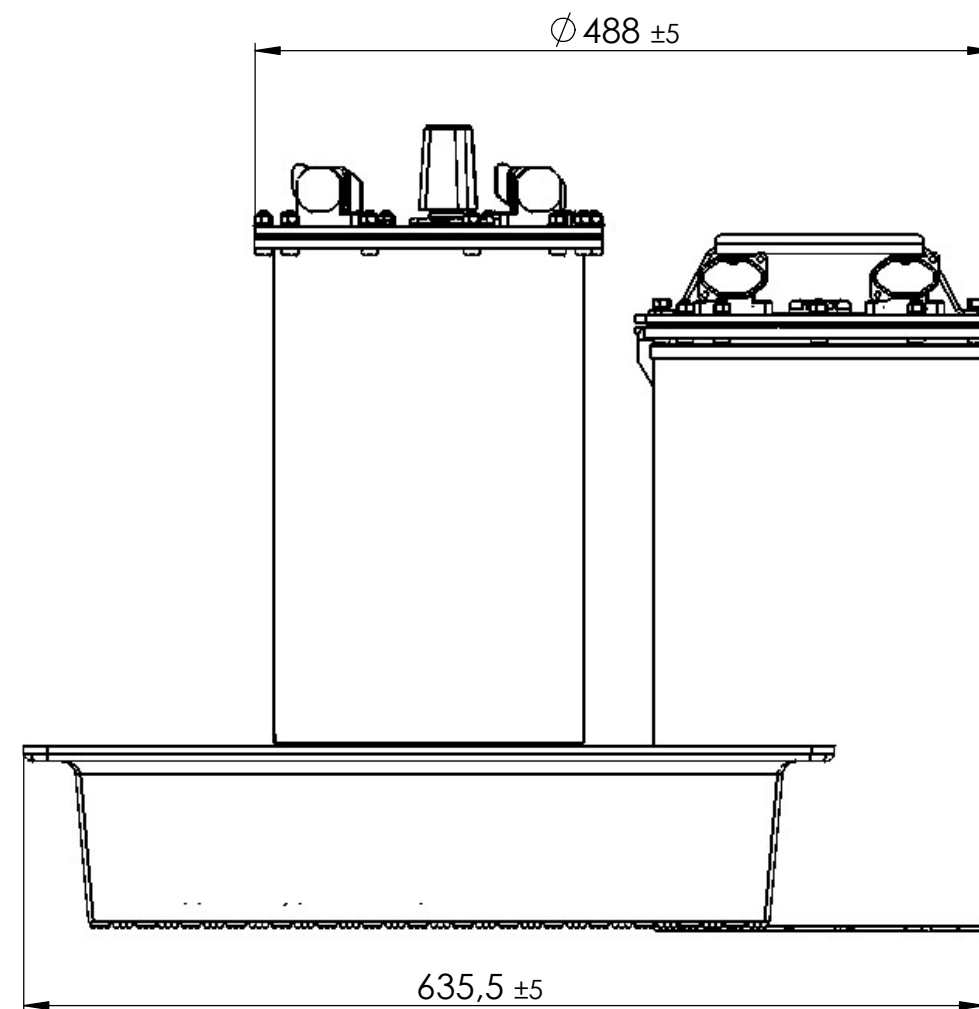


Protection class according to DIN EN 60529: IP 68 2m

Mounting position: upright

Manhole installation:

- max. 300 mm distance from square-end to surface level
- 300/350 mm eccentric clearance for cable connectors
- 500 mm centric clearance in manhole cover with respect to actuator and battery

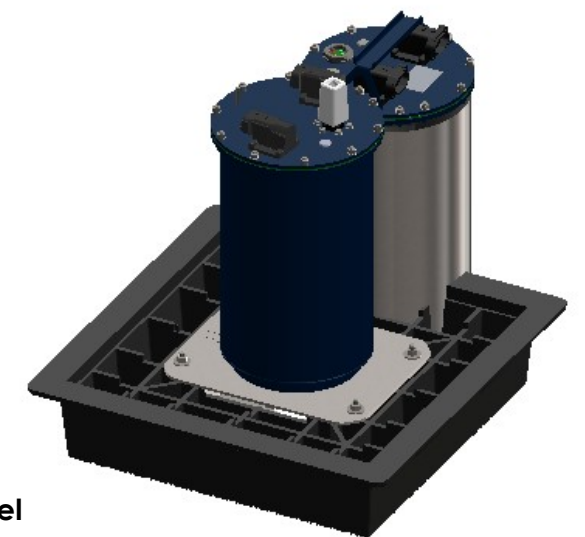

Title							
Customer drawing 3S 500 D with battery pack							
Material				Drawing type		Sheet No	Tolerances
-				Customer drawing		1 / 1	-
Weight (g)	Scale	Date	Drawn by	Checked by	Format	Index	DWG No
-	1:5	10.12.2025	D. Bohle	S. Sacharowitz	A3	3	02.0203