

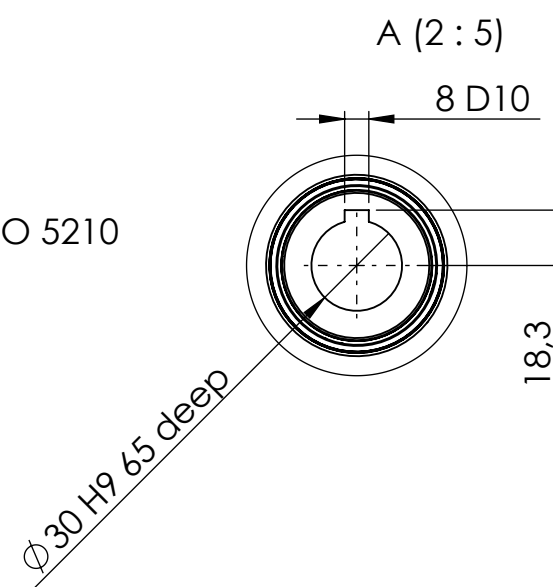
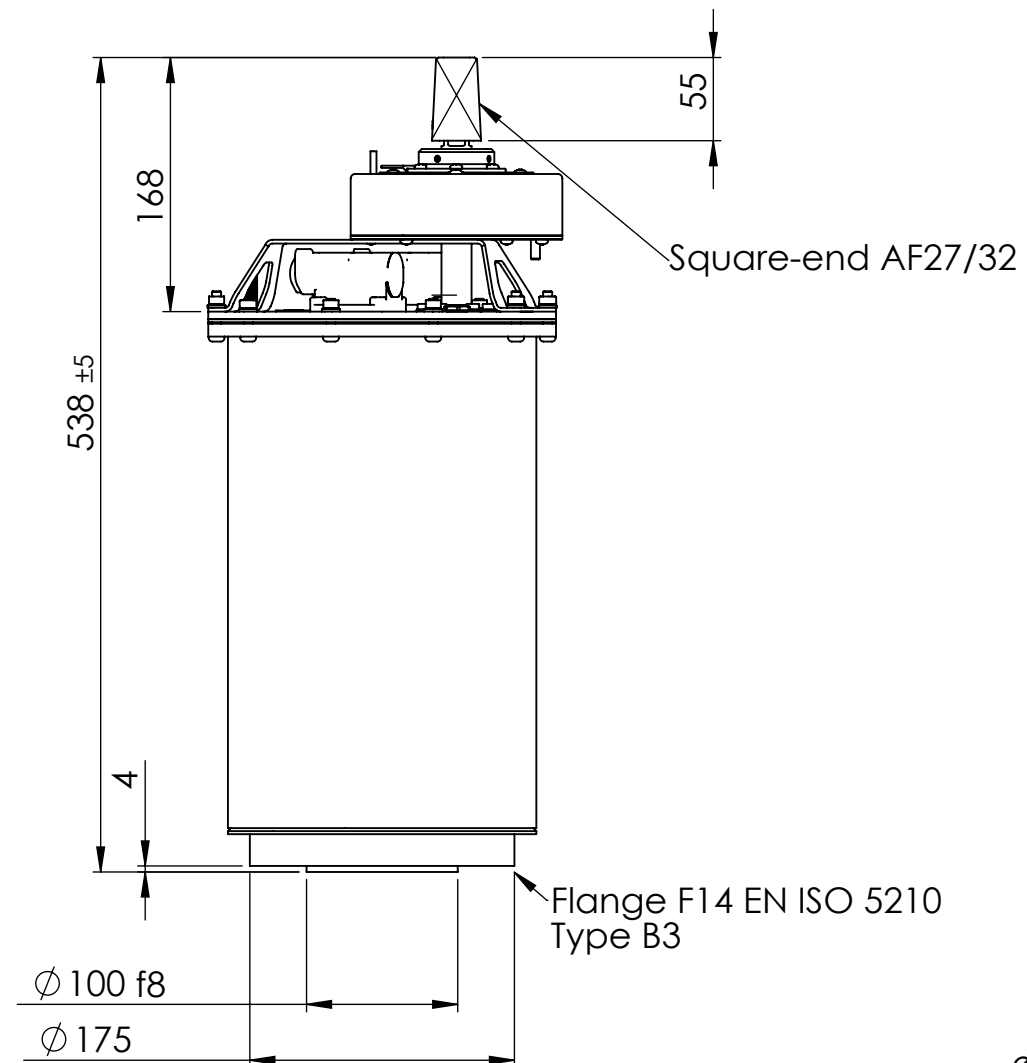


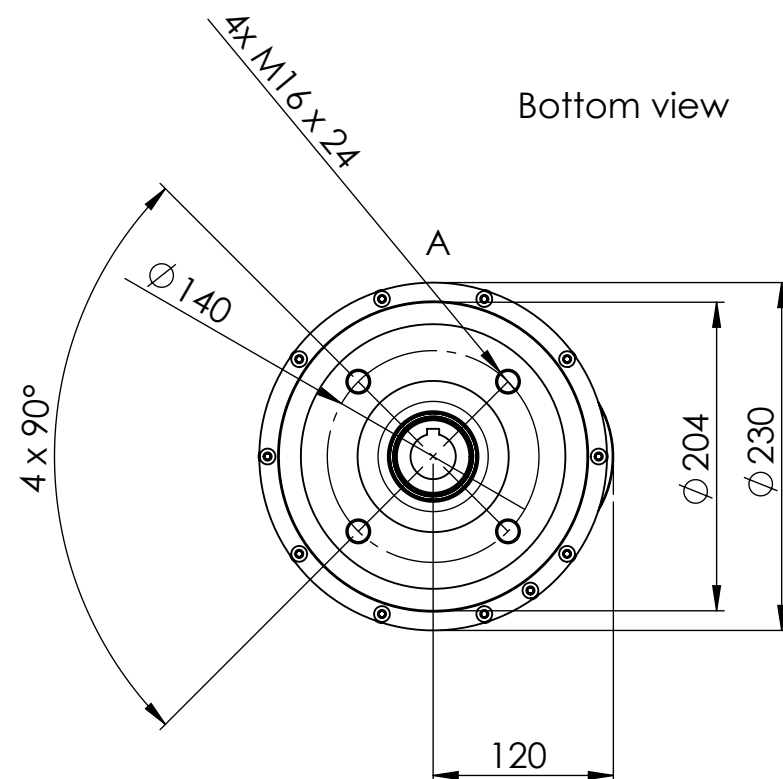

Top view
1:2

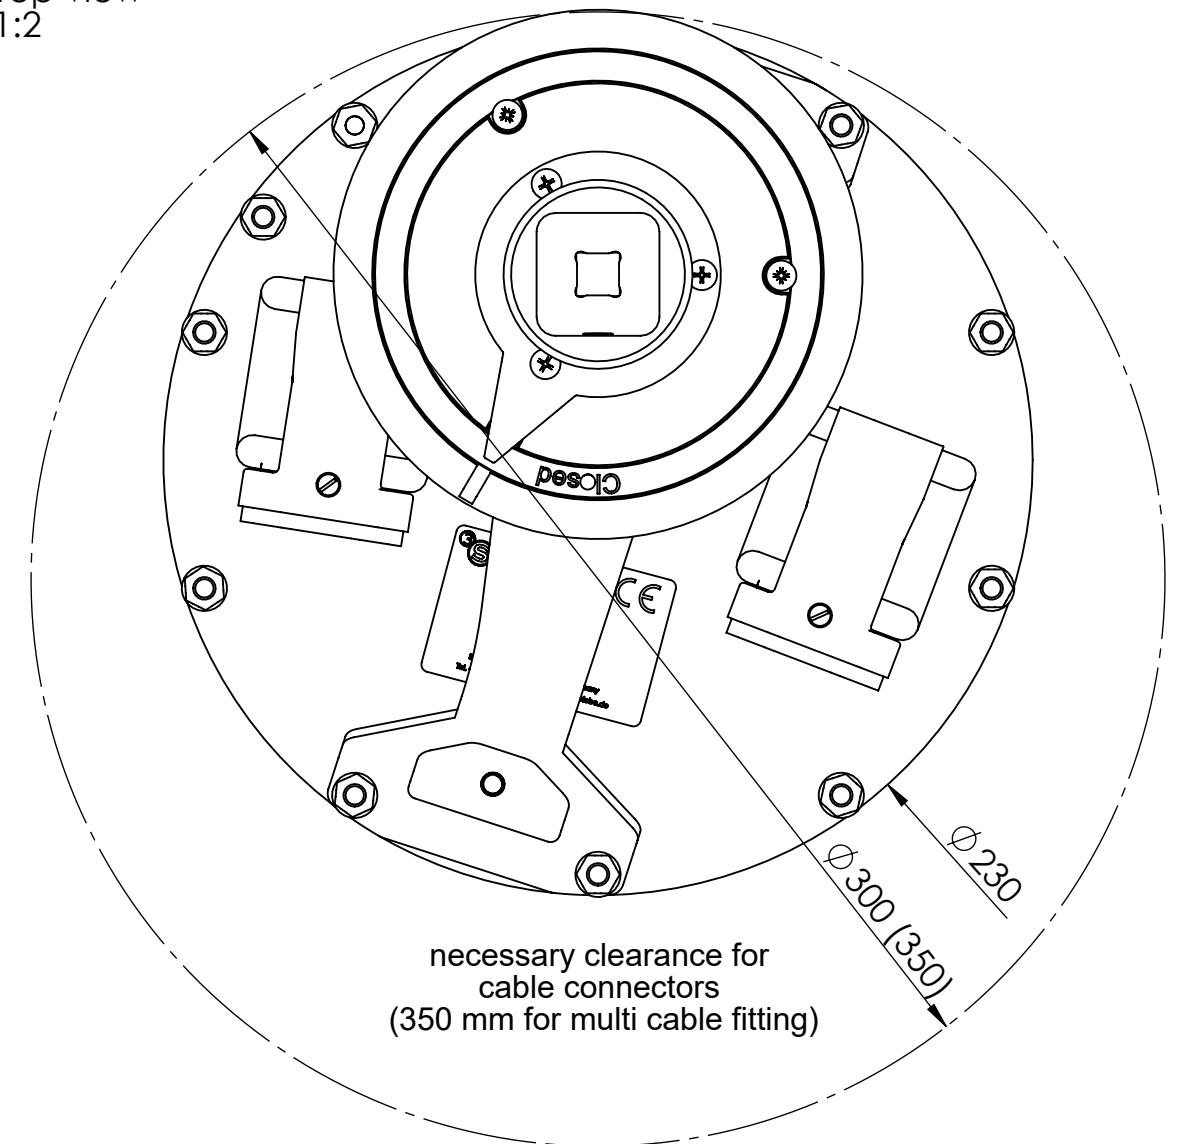

Bottom view

Protection class according to DIN EN 60529: IP 68 2m

Mounting position: upright

Manhole installation:

- max. 300 mm distance from square-end to surface level
- 300/350 mm eccentric clearance for cable connectors as shown
- 250 mm centric clearance in manhole cover with respect actuator



Title Customer drawing 3S 500 DP						 Antriebstechnik für Armaturen	
Material -			Drawing type Customer drawing		Sheet No 1 / 1	Tolerances	
Weight (g) 34500	Scale 1:5	Date 07.01.2026	Drawn by D. Bohle	Checked by S. Sacharowitz	Format A3	Index 3	DWG No 02.0218